

Bracton High Performance Glasswasher Range MR / BR2 Series

The new Bracton Glasswashers represent the next step in evolution for the Bracton glasswashers, using the latest technology to provide greater reliability with the same high functionality you expect from the original Bracton Multi-Function Glasswasher at a better price!

- Low voltage touch panel – safer, more reliable and no more sticky buttons!
- 1 Minute or Soak cycle
- Stainless 304 Rinse Tank
- Satin Finish - Stainless 304 Body.
- Minimal water usage per cycle – (MR – 2L, BR2 – 3.5L) minimising environmental impact resulting in lower chemical, water & electricity bills.
- Easy to clean – Accessible filters.
- Robust brass solenoids


Ergonomics & Safety

- Easy glide racks
- Splash proof controls
- Cycle cut-out micro switch in case of accidental door opening
- 12 month warranty

Technical

<u>CYCLE</u>	<u>MR SERIES</u>	<u>BR2 SERIES</u>
Cycle Times	1 min / 3 min (soak)	1 min / 3 min (soak)
Eliminate Hand washing	Yes	Yes
Cold Rinse	Yes	Yes
<u>ELECTRICITY</u>		
Power supply	230v 50 Hz	230v 50 Hz
Amps	15A	15A
Washing pump	220w	550w
Boiler heated element	3200w	3000w
Tank heated element	2000w	2000w
<u>WATER SUPPLY</u>		
Temperature	65°C	65°C
Pressure	200 – 400 Kpa	200 – 400 Kpa
Flow Rate Minimum	20 Litres per min	20 Litres per min
Hot Water consumption per cycle	2 Litres	
Connection	20mm (R ³ / ₄ BSP Male)	20mm (R ³ / ₄ BSP Male)
Waste	40mm	40mm
<u>PERFORMANCE</u>		
Theoretical output (racks per hour)	60	60
Actual Approx output (racks per hour)	46 (920 glasses)	46 (920 glasses)
<u>FORM</u>		
Rack dimensions	17"x14" Glass Rack	450mm (max)
Net weight	41Kg	48Kg
Rack Clearance	280mm	270mm
Dimensions	See Below	See Below

* All Bracton Glasswashers come with variable legs to suit the specific venue. (10mm - 275mm)

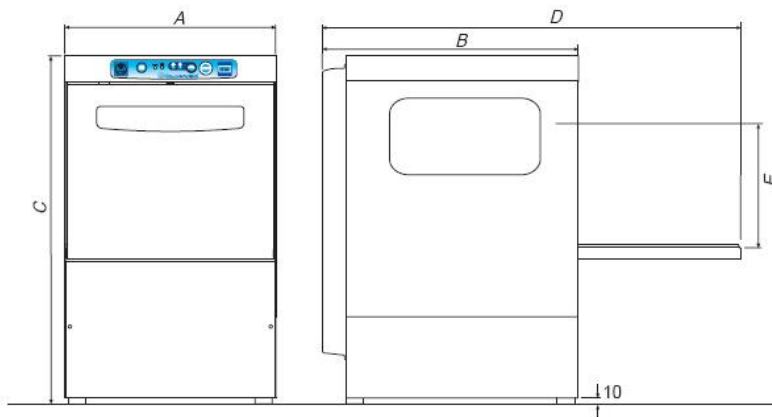

	MR	BR2
A =	430mm	530mm
B =	521mm	600mm
C =	680mm	755mm
D =	851mm	940mm
E =	280mm	270mm

Bracton Industries (NSW) P/L
 50 Chard Rd, Brookvale NSW 2100 Australia
 Phone: (02) 9938 1800 Fax: (02) 9905 0979